

1

2







3

4

5

6

Total length (optional)

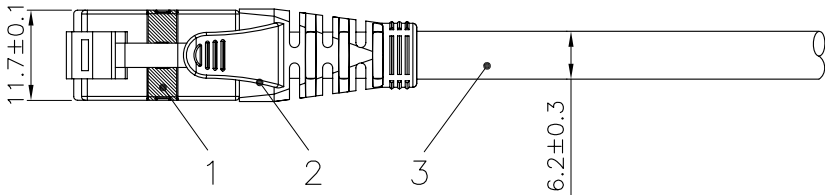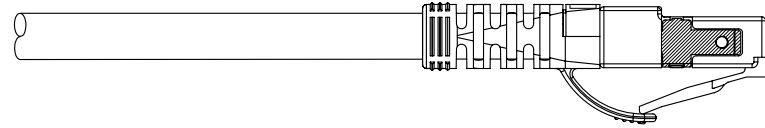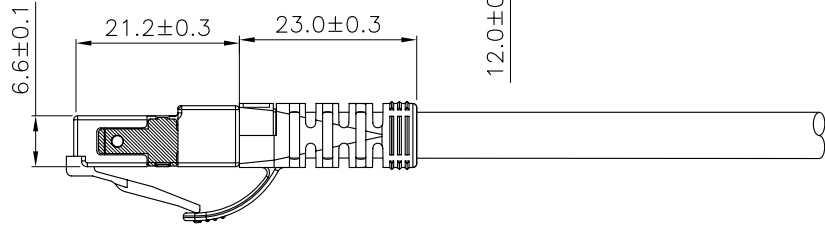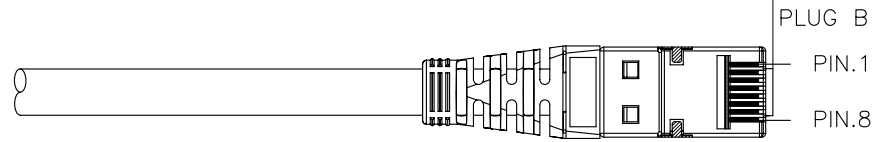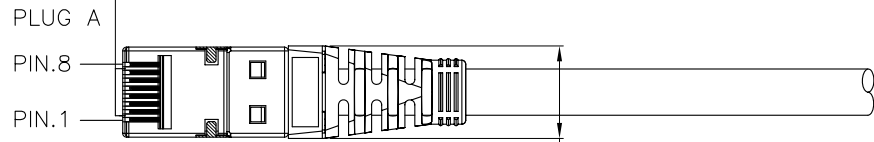

### Specification :

#### Material :

1. RJ45 Plug :
  - 1-1. Housing : Polycarbonate, UL 94V-2 Transparent color.
  - 1-2. Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated.
  - 1-3. Contact finished : Min. 50 micro-inch Gold plated.
  - 1-4. Shield : Bronze with Nickel plated.
2. Narrow: PP-P0060GN.
3. Cable : S/FTP Braid Screened, Aluminum Foil Shielded for Each Twisted Pair, 4 pair Stranded wire UL material approved. 26 AWG conductor and LSZH jacket.

Remark : ACBHXX060X XXX X

(1) (2) (3) (4)

- (1) XX : Jacket Color  
 01=Black(RAL9011), 02=Gray(RAL7035), 03=Red(RAL3031)  
 05=White(RAL9010), 06=Yellow(RAL1021), 07=Blue(RAL5015)  
 08=Green(RAL6029), 09=Orange(RAL2003), 10=Purple(RAL4005)  
 11=Pink(RAL4003)
- (2) X : Wiring  
 1=T568A, 2=T568B, 3=T568A & T568B combination
- (3) XXX : Length
- (4) Length Unit : 1=cm, 2=meter, 3=feet.  
 (3)(4) : 0501=0.5meter(50cm), 0012=1meter, 0102=10meter  
 0033=3feet, 0103=10feet

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING	19.MAR.2008	LSY	<b>Mini6™</b>
	CHECK	19.MAR.2008	LSY	
	APPROVAL	19.MAR.2008	NICK	
	DATE		NAME	ITEM NO.: PCTS60XXA
SCALE	1/1 (A4)	UNIT	mm	DES.: C6a S/FTP Patch Card With SR type
		DRAWING NO. PCTS60XXA		
		DRAWING CLASSIFICATION	S	

1

2

0

3

4

10cm

5

6