

## specifications

Consolidation Point Boxes shall be used with low profile under floor systems and vertical and horizontal wall mount applications. The box shall accept up to 48 modules and be made of 16-gauge steel for long term durability. The box shall have top and bottom cable access with removable panels that include grommets to keep out debris.



**NEW!**

## Consolidation Point Box

### technical information

<b>Dimensions:</b>	CUFB48BL: H x W x D = 1.63" x 10.00" x 14.88" (41.5 x 254.0 x 377.9mm)
<b>Mounting options:</b>	Vertical or horizontal wall mounting or low profile raised floor system (minimum depth of 1.65")
<b>Packaging:</b>	Box includes 48 port label and 6 <i>TAK-TY</i> ™ cable ties Fiber Conversion Kit includes 4 <i>PAN-TY</i> ™ cable ties, 2 adhesive fiber spools, 2 support brackets with screws to hold fiber cable, 1 grounding lug, 1 laser warning label, 1 fiber warning label and 24" spiral wrap

### key features and ...benefits

<b>Modularity</b>	Accepts all <i>MINI-COM</i> Modules; individual modules snap in and out
<b>High density</b>	24 port capacity on each side of box; total of 48 ports
<b>Optional fiber conversion kit</b>	Supports use in fiber applications
<b>Removable panels</b>	Allows <i>PANDUIT</i> T70 Raceway to be flush against panel for clean, wall mounted appearance
<b>Durable</b>	Made with 16 gauge rugged steel for long term durability
<b>Center metal supports</b>	Supports raised floor panels

### applications

The Consolidation Point Box is designed to work with *SMED NEXUS*™ Under Floor Systems as a consolidation point, although it is also suitable for other under floor systems with a minimum depth of 1.65". The box can also be wall mounted vertically or horizontally as a

consolidation point. Consolidation Point Boxes save time and money by reducing the amount of time required to complete moves, adds and changes. Troubleshooting is also simplified as the connections can be tested and certified before installation.

*NEXUS*™ is a trademark of *SMED International*, Calgary, Alberta, Canada

Visit our website at: [www.panduit.com/ncg](http://www.panduit.com/ncg)

#### Consolidation Point Box

<b>Consolidation point box:</b>	CUFB48BL
<b>Fiber conversion kit:</b>	CUFF-KIT

#### MINI-COM Modules




<b>Category 6:</b>	CJ688T3**
<b>Category 5e:</b>	CJ5E88T**
<b>Fiber multimode prepolished:</b>	FJJSMM5CEI
<b>Fiber multimode:</b>	FJJGM5C**
<b>Fiber singlemode:</b>	FJJGS9CBU

**\*\*Substitute:** BL=Black  
EI=Electrical Ivory  
IW=Off White  
RD=Red  
BU=Blue  
GR=Green  
YL=Yellow  
VL=Violet  
OR=Orange  
IG=International Gray  
WH=White

#### installer tip

Use optional kit (CUFF-KIT) for fiber applications.

# Consolidation Point Box

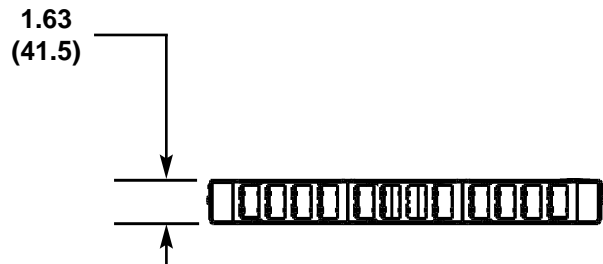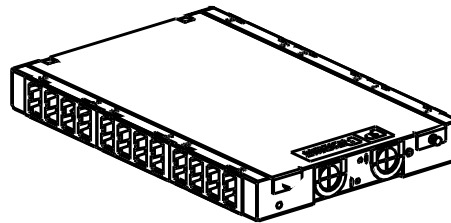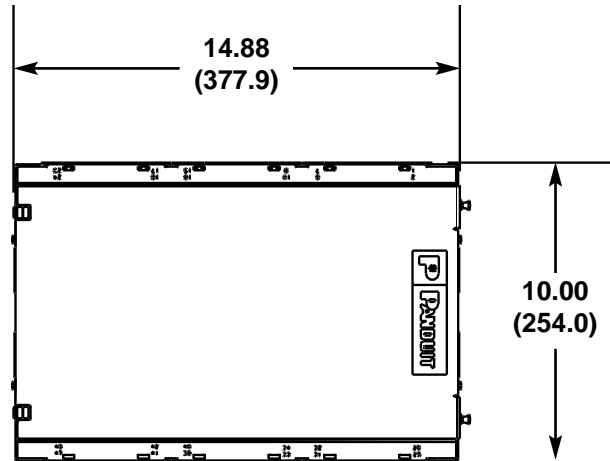

Dimensions are in inches (Dimensions in parentheses are metric)

Our products are warranted to be free from defects in material and workmanship at the time of sale but our obligation under this warranty is limited to the replacement of any product proved to be defective within 6 months (for product) or 90 days (for tools) from the date of delivery. Tool warranty is void if Panduit tools are modified, altered or misused in any way. Use of Panduit tooling with any product other than the specified Panduit products for which the tool was designed, constitutes misuse. Before using, user shall determine the suitability of the product for his intended use and user assumes all risk and liability whatsoever in connection therewith.

This warranty is made in lieu of and excludes all other warranties, expressed or implied. THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR USE ARE SPECIFICALLY EXCLUDED. Neither seller nor manufacturer shall be liable for any other injury, loss or damage whether direct or consequential, arising out of the use of, or the inability to use, the product.

The information contained in this literature is based on our experience to date and is believed to be reliable. It is intended as a guide for use by persons having technical skill at their own discretion and risk. We do not guarantee favorable results or assume any liability in connection with its use. Dimensions contained herein are for reference purposes only. For specific dimensional requirements consult the factory. This publication is not taken as a license to operate under, or a recommendation to infringe any existing patents. This supersedes and voids all previous literature, etc.



WORLD HEADQUARTERS  
PANDUIT CORP.  
Tinley Park, Illinois, USA  
Phone: 888-506-5400, ext. 6914  
708-532-1800, ext. 6914  
Fax: 708-460-2897  
Email: info@panduit.com  
Internet: www.panduit.com/ncg

**For Pricing and Further Information —  
Contact your local authorized  
PANDUIT PAN-NET™ Distributor or Sales Office**

PANDUIT CANADA  
Div. of PANDUIT CORP.  
Markham, Ontario  
Phone: 905-475-6922

EUROPEAN HEADQUARTERS  
PANDUIT EUROPE LTD.  
London, UK  
Phone: 44(0) 208-601-7200

ASIAN HEADQUARTERS  
PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
Phone: (65) 379 6700

PANDUIT CORP.  
Japan Branch  
Phone (81) (3) 3767-7011

PANDUIT MEXICO/LATIN AMERICA  
& CARIBBEAN  
Phone: (52) 3 666-2501

PANDUIT (AUST.) PTY. LTD.  
Phone: (61) 3-9794 9020